原油阀产品说明

这款 6英寸原油阀是专为槽罐车及储罐中原油介质设计的专用卸载装置。安装于罐体后部，适用于原油、重油等粘性油介质。阀体采用铸钢材质，法兰表面经过精密加工，配备红色手动转轮用于现场手动启闭。作为原油储运系统的核心安全部件。

核心功能：

1. 阀体外壳采用优质碳钢材质，具备抗拉、屈服强度充足、刚性好可承受中高压工况等特点。
2. 入口内部一字导流挡板，出料时可抑制涡流，减少空气吸入，降低静电风险。
3. 配备红色手轮，可以微调开度，控制出料流量大小。
4. 关闭后实现罐与外管路的完全切断，将罐与管路之间实现安全隔离，方便下游管路维修。

公称直径	DN150
材质	碳钢
安装方式	法兰连接
公称压力	1.6Mpa
温度范围	-40℃~+120℃
认证标准	欧盟ADR标准
密封材料	石墨级硬密封
产品尺寸	29cm*37cm*36cm
产品重量	29KG

罐车部件：原油阀系列　DSSY-YYF150B




● 功能特性

1. 阀体外壳采用优质碳钢材质，具备抗拉、屈服强度充足、刚性好可承受中高压工况等特点。
2. 入口内部一字导流挡板，出料时可抑制涡流，减少空气吸入，降低静电风险。
3. 配备红色手轮，可以微调开度，控制出料流量大小。



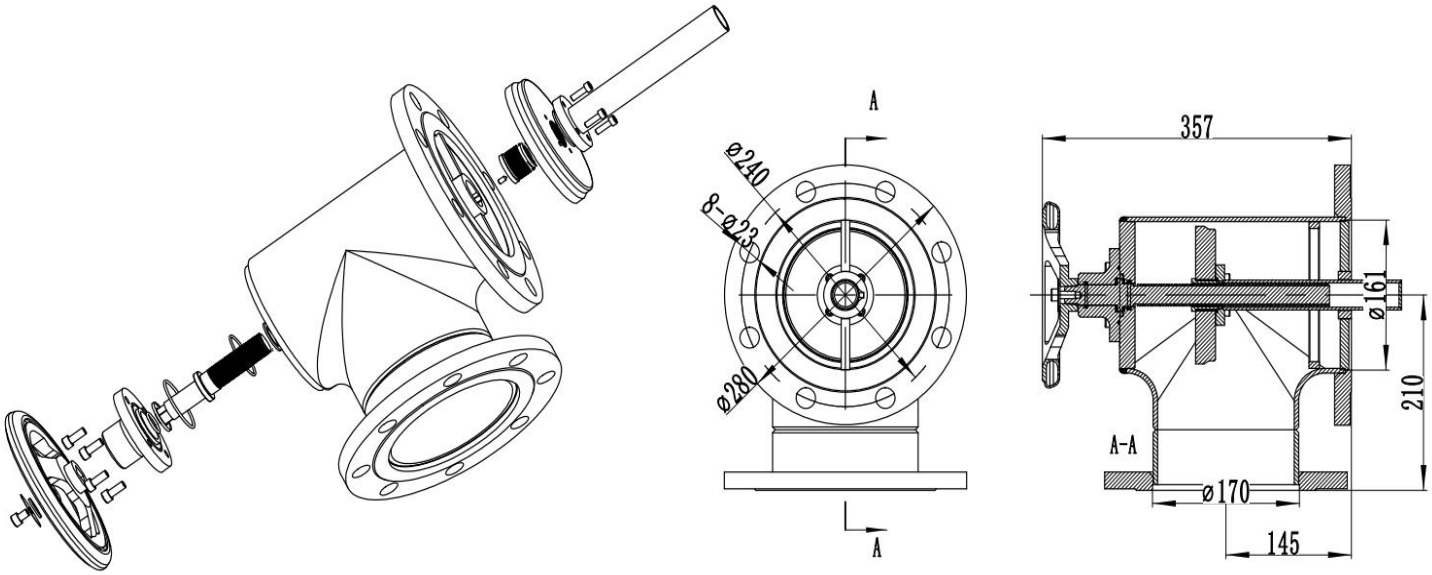


A
ø240
8-ø23
ø280
A
357
ø161
210
A-A
ø170
145


Tube Doors
Safety Vapor Vents
Tank Vapor Vent
Dust Caps & Plugs With Needles for Hose Tubes
FloTech Overfill Detection
Ladder Stop
All Nickelate
Safety Vapor Vents
Snorkeling Stand
API Valve Caps
FUEL
Tube Doors
API Rivet
Tube Doors
VAPOR FLOW
Single Point Vapor Recovery Fuel Drop Co-Axial Elbow
Tube Doors
Hose Nose Couplers
Tube Doors
Vapor Adapter
Tube Doors
Ladder FW Cap
Two Set Maxims
Dust Cap
Tulip Dove
Drop Hose Points
VAPOR
FUEL